


Picture		
----------------	--	--



Performance Parameter		
------------------------------	--	--

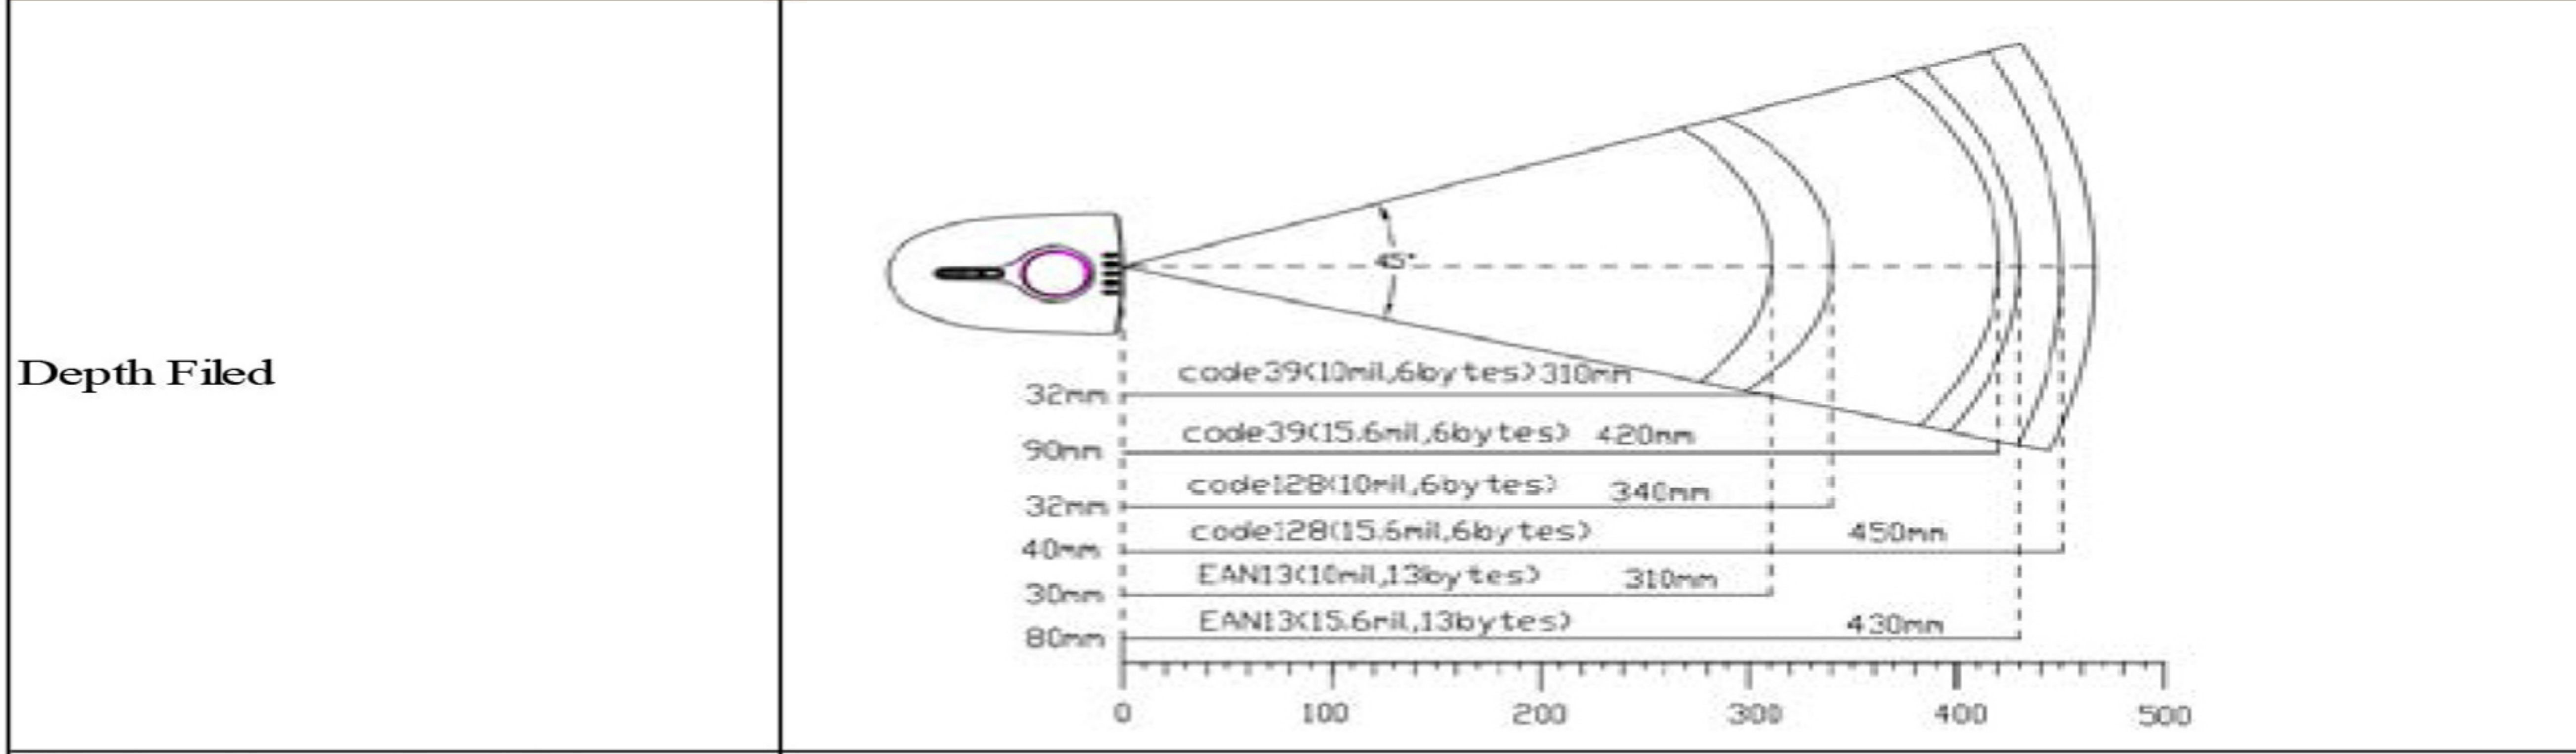

Wireless Transmitting Distanc (without barrier)	300 - 400m	
Infrared induction distance	—	
Optical Source	620nm Visible red light diode	
Imaging Sensor	CCD	
Resolution Ratio	2500 pixel	
Image Resolution	≥ 5mil	
Minimum Contrast	≥ 30%	
Barcode Types	Code128, EAN-13, EAN-8, Code39,UPC-A, UPC-E, Codabar, Interleaved 2 of 5,ISBN, Code 93, UCC/EAN-128, GS1 Databar etc.	
Decoding Speed	300times/second	
Barcode Sensi	Tilt	±55°
	Rotate	±25°
	Deflection	±75°
Data Interface Port	RJ-45	

Mechanical and Electric Performance		
--	--	--

Size(Length x Width x Height)	210×84×117.5 mm	
Weight	320g (Include Cradle)	
Indicator	Siren and LED light	
Battery Capacity	600mah	
Max.Power	750mw	
Working Voltage	DC5V	
Current	Max.Curren	150ma
	Working Current	90ma
	Stand-by Current	68ma
	Sleeping Current	3ua
Charging Current	450ma	

Accessory List		
-----------------------	--	--

Data line	USB Charging Line
Drive CD	—
Operation Manual	1Piece
Charging Cradle	1Piece

Environmental Parameter		
--------------------------------	--	--

Storage Temperature	-40°C ~ 60°C
Working Temperature	0°C ~ 50°C
Relative Humidity	0 ~ 95%
Height Range	1.5m
IP Rating	IP52

Certificates		
---------------------	--	--

CE,RoHS,EMC,LVD, ISO9001:2008, ISO14001:2004
--