
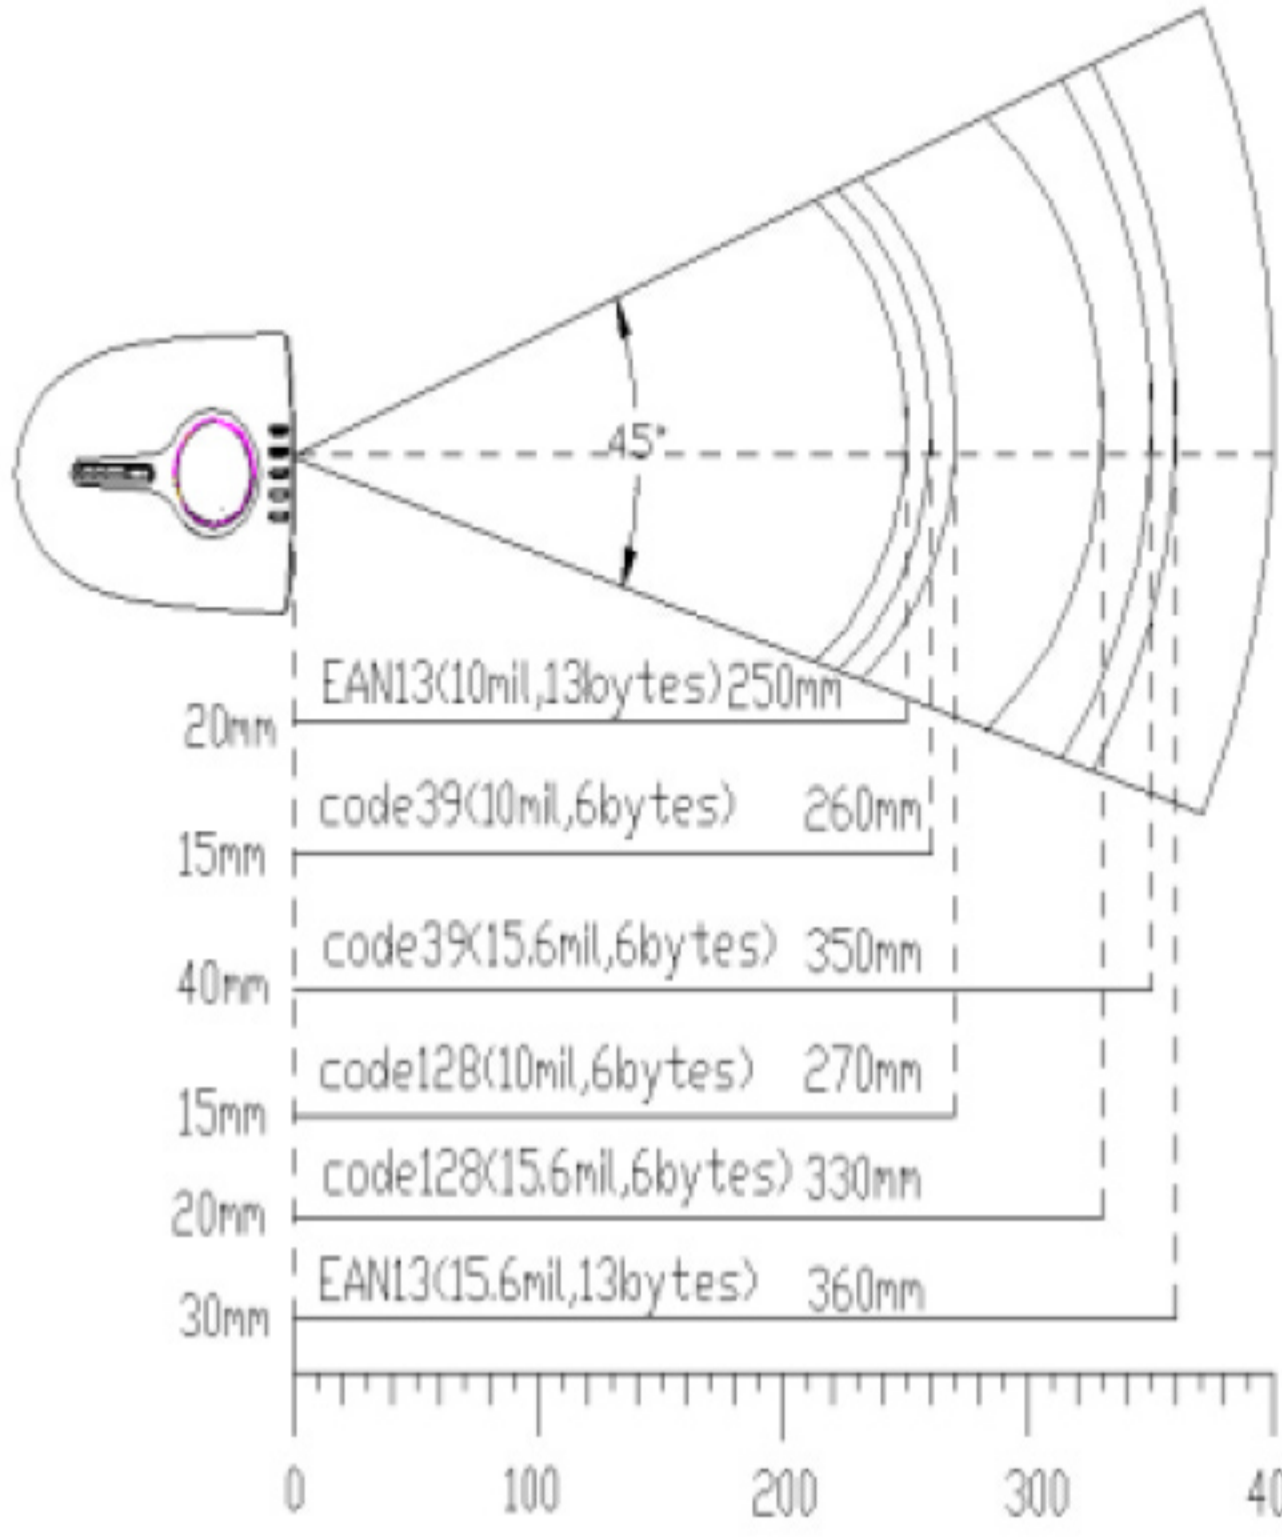


Para	Mode	YT-760A
Picture		
Product Picture		
Performance Parameter		
Depth Filed		
Wireless Transmitting Distanc (without barrier)	—	
Infrared induction distance	150 - 200mm	
Optical Source	650nm Visible red light diode	
Image Resolution	≥4mil	
Minimum Contrast	≥ 30%	
Barcode Types	UPC/EAN/JAN,UPC/EAN with supplementals , UCC/EAN128,Code39,MSI,Code11,Code39 Full ASCII, Code39 Trioptic, Code128,Code128 Full ASCII Codabar,Code93, Discrete 2 of 5 IATA,RSSvanrians,Codabar,chinese 2 of 5,Interleaved 2/5, Interleaved 2 of 5, International general dimensional barcodes 。	
Decoding Speed	100times/s	
Barcode Sensitivity	Tilt	±65°
	Rotate	±42°
	Deflection	±60°
Data Interface Port	RJ-45	
Mechanical and Electric Performance		
Size(Length x Width x Height)	92.5×70×154.6 mm	
Weight (except cable)	148g	
Indicator	Siren and LED light	
Battery Capacity	—	
Max.Power	500mw	
Working Voltage	DC5V	
Current	Max.Curren	100ma
	Working Current	97ma
	Stand-by Current	77ma
	Sleeping Current	—
Charging Current	450ma	
Accessory List		
Data line	USB data line(1.8m)	
	RS232 data line(1.8m)	
Receiver	—	
Drive CD	—	
Operation Manual	1 Piece	
Charging Cradle	—	
Stand	1 Set	
Environmental Parameter		
Storage Temperature	-40°C ~ 60°C	
Working Temperature	0°C ~ 50°C	
Relative Humidity	0 ~ 95%	
Height Range	1.5m	
IP Rating	IP52	